
TENSEI™ CK PRO ORANGE

Low Launch and Low Spin

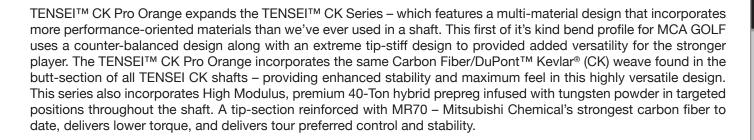

SHAFT SPECIFICATIONS

Shaft Name	Flex	Length (in)	Weight (g)	Tip OD (in)	Tip // (in)	Butt OD (in)	Torque (deg)	Kick Point
TENSEI™ CK Pro Orange 60	R	46.0	62	0.335	3.0	0.606	3.6	High
TENSEI™ CK Pro Orange 60	S	46.0	64	0.335	3.0	0.606	3.5	High
TENSEI™ CK Pro Orange 60	TX	46.0	67	0.335	3.0	0.609	3.4	High
TENSEI™ CK Pro Orange 70	S	46.0	72	0.335	3.0	0.608	2.9	High
TENSEI™ CK Pro Orange 70	TX	46.0	73	0.335	3.0	0.610	2.8	High
TENSEI™ CK Pro Orange 80	TX	46.0	87	0.335	3.0	0.598	2.6	High

INSTALLATION | TIP TRIMMING INSTRUCTIONS

Driver	3 Wood	5 Wood	7 Wood	9 Wood
0"	0.5"	0.75"	1.0"	1.0"

¹ All shafts are designed to be butt trimmed to length.

² Shaft installation should only be completed by a qualified, trained club builder. To find an authorized Mitsubishi Chemical account in your area please visit our **dealer locater**.

³ DuPont™ Kevlar® is a trademark or registered trademark of E. I. du Pont de Nemours & Company.